

## OPW 11AP®-0492 & 11BP®-0492 ALTERNATIVE FUEL NOZZLES

The OPW 11AP®-0492 and 11BP®-0492 nozzles are designed for use with today's alternative fuels, and feature a protective, electroless, nickel-plated body and spout to prevent contamination of E85, E100 and methanol fuels.

ONE COMPANY. ONE WORLD. ONE SOURCE.™

# UNITED


PETROLEUM EQUIPMENT INC.

300 Custer Dr.  
Battle Creek, MI 49037  
(800) 964-UPEI (8734)

### Materials

- Body:** aluminum
- Lever & Lever Guard:** Duratuff®
- Packing:** Graphite with Teflon®
- Disc:** Viton®
- Coating:** electroless nickel plating\*
- Spout:** aluminum w/electroless nickel plating\*
- Inlet Size:** 3/4" NPT
- Weight:** 2.73 lbs. each  
1.25 kg each

\*Meets all known automobile MFGs' requirements for maintaining fuel purity.

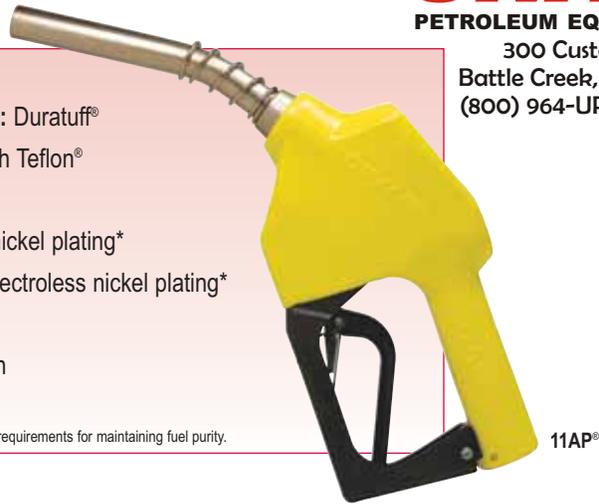

### Features

- ◆ Same efficient flow rate as the standard 11AP® and 11BP® models.
- ◆ 11BP® designed specifically for prepay or card lock systems.
- ◆ All aluminum and zinc parts electroless, nickel-plated - to protect against corrosion and prevent contamination of E85, E100 and methanol fuels. Contains no cadmium or zinc-plated, wetted parts.
- ◆ "Accu-Stop"® flow control - allows your customers to top off their tanks to the exact amount they want...easy to stop gasoline flow precisely.
- ◆ Low-profile aluminum body - lightweight, easier to handle. Provides an attractive, image-enhancing appearance.
- ◆ Full hand insulator - protects both nozzle and vehicle, and insulates user's hand.
- ◆ Duratuff® lever and lever guard - for additional durability to protect against rough handling.
- ◆ Hold-open rack is available for one-hand control - means easy setting to flow rate for customer convenience.
- ◆ Blocker on lever guard - to help prevent the nozzle from being jammed into the open position with a foreign object.
- ◆ Exclusive two-stage lever assembly - provides a positive shut-off, even if still being held in wide open position by the user.
- ◆ Design working pressure - OPW products are designed to work at 50 PSI (3.45 bar) maximum pressure.



# OPW

A DOVER COMPANY

North America Toll Free – TELEPHONE: (800) 422-2525  
Fax: (800) 421-3297 ♦ Email: domestic@opw-fc.com  
International – TELEPHONE: (513) 870-3315 or (513) 870-3261  
Fax: (513) 870-3157 ♦ Email: intl@opw-fc.com ♦ www.opw-fc.com  
9393 Princeton-Glendale Road ♦ Hamilton, OH 45011

### Ordering Specifications

NEWGARD™ Full Insulator Color*	11AP® 1 3/16" O.D. Spout	11BP® 1 3/16" O.D. Spout
Black	11AP-0492	11BP-0492
Blue	11AP-0592	
Yellow	11AP-0992	11BP-0992

\* Other colors available upon request. Requires minimum lot order. Please contact Customer Service for more information.

### Replacement Parts

Product	Product #	O.D.		Length		Weight		Used On
		in.	mm	in.	mm	lbs.	kg	
Two-Piece Spout Kit - E85	5BP1-0492	1 3/16"	21	7"	178	.47	.22	11AP-0492
Two-Piece Spout Kit - E85	5BBP1-0492	1 3/16"	21	7"	178	.47	.22	11BP-0492

### Listings and Certifications

NOTE: See OPW's Website at: [www.opw-fc.com](http://www.opw-fc.com) for product instruction sheets, trouble-shooting guides, how-to-use guide and to view the Do's & Don'ts at the Gas Pump video.