# HUSKY X COLD WEATHER NOZZLE

## AUTOMATIC NOZZLE



**Automatic shut-off nozzle for self-service and full service stations.**

- Nozzle comes with smooth Full Grip Guard.
- Aluminum reinforced spout bushing keeps the spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Contains a poppet disc seal, rated at -40˚F/C (exceeding the UL standard of -20˚F / -29˚C), to prevent fuel leakage from the main seal in extreme cold weather.

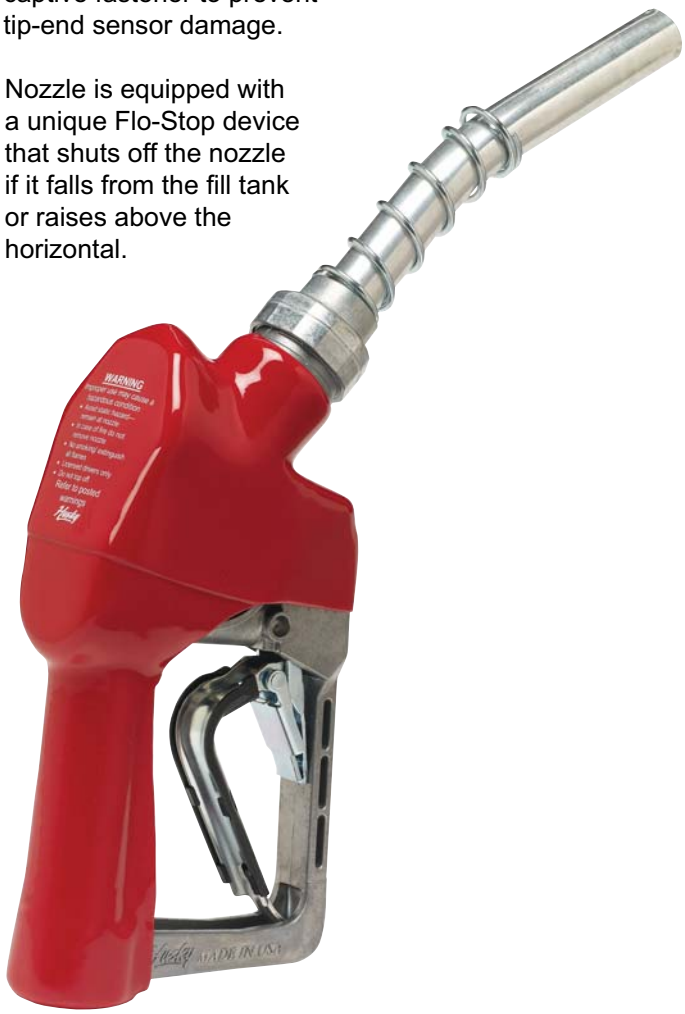


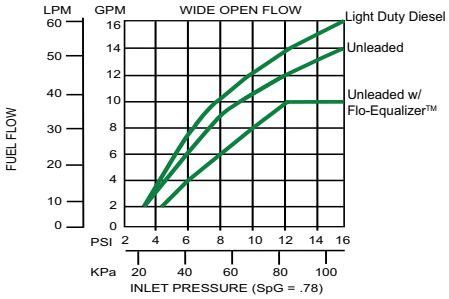


## SPECIFYING INFORMATION

| Model Number | Description | Weight lbs.(kg.) |
|---|---|---|
| 498404 | New, Unleaded, w/ Standard Hold Open Clip | 2.6 (1.18) |
| 498408 | New, Unleaded, w/o Hold Open Clip | 2.6 (1.18) |
| 498403 | New, Light Duty Diesel, w/ Standard Hold Open Clip | 2.7 (1.22) |
| 498407 | New, Light Duty Diesel, w/o Hold Open Clip | 2.7 (1.22) |
| 498462 | New, Unleaded, w/ Standard Hold Open Clip and Waffle Splash Guard | 2.7 (1.22) |
| 498461 | New, Light Duty Diesel, w/ Standard Hold Open Clip and Waffle Splash Guard | 2.7 (1.22) |
| 503704 | Rebuilt, Unleaded, w/ Standard Hold Open Clip | 2.6 (1.18) |
| 503703 | Rebuilt, Light Duty Diesel, w/ Standard Hold Open Clip | 2.7 (1.22) |

## CONSTRUCTION

| | |
|---|---|
| Body | One piece die cast aluminum |
| Seals | Fluorocarbon |
| Packing | Double O-ring seal protected by fiber reinforced Teflon |
| Lever | One piece contoured steel |
| Inlet | ¾ in / 19.05 mm NPTF |

## PATENTS and LISTINGS

Patent Numbers: 4,658,987 4,825,916 301,366

Listings: c UL us

MADE IN THE U.S.A.

ISO 9001:2000 QUALITY SYSTEM

CONVENTIONAL FUELING

# HUSKY X COLD WEATHER NOZZLE

## AUTOMATIC NOZZLE

- **Dimensions**
- **Accessories**

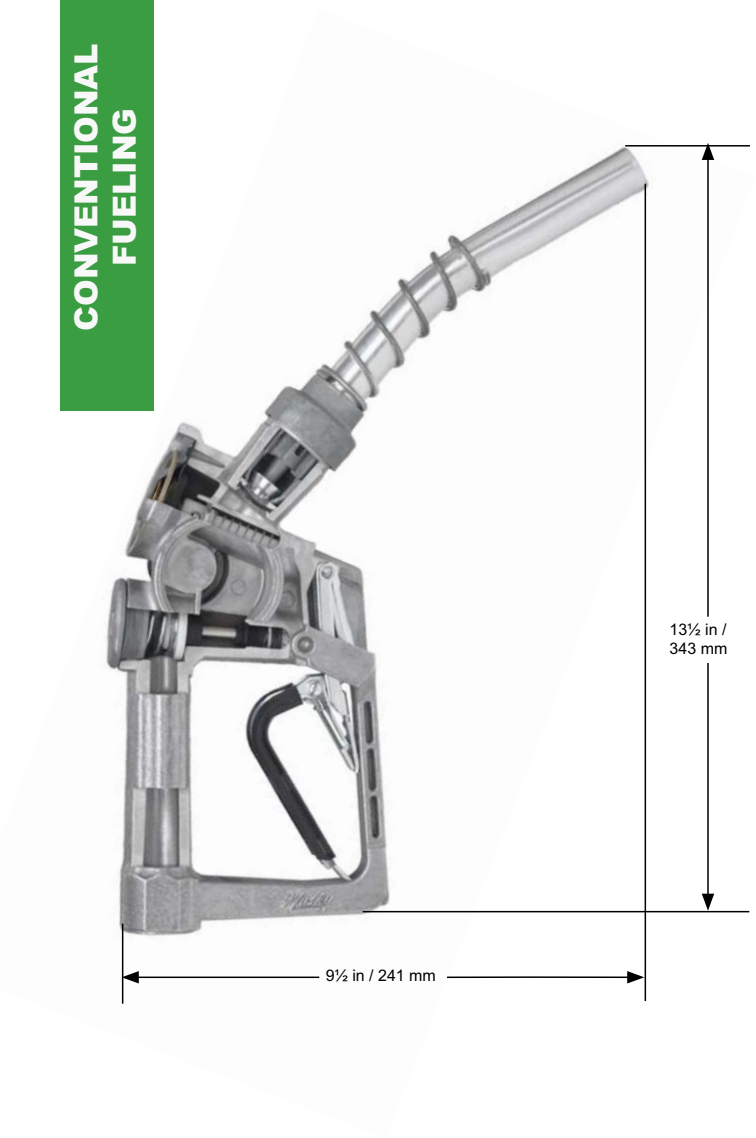


### Safe-T-Breaks®

| Model No. | Description |
|---|---|
| 2273 | ¾" F x ¾" F Non-Reconnectable Safe-T-Break® |
| 6130 | ¾" x ¾" Non-Reconnectable PCC Safe-T-Break® |
| 3360 | ¾" F x ¾" F Reconnectable Safe-T-Break® |

### Swivel

| Model No. | Description |
|---|---|
| 0350 | ¾" M x ¾" F Multi-plane Swivel |
| 0355 | ¾" M x ¾" F Multi-plane Black Swivel |
| 2272 | ¾" M x ¾" F 90° Pump Swivel |

### Spouts

| Model No. | Description |
|---|---|
| 1473 | Unleaded Spout |
| 1471 | Light Duty Diesel Spout |

### Guards

| Model No. | Description |
|---|---|
| 4145 | Full Grip Guard |
| 1806 | Full Grip Reguard |
| 1808 | Waffle Splash Guard |
| 5494 | Lever Cover |

### Flo-Equalizers™

| Model No. | Description |
|---|---|
| 4490 | ¾" F x ¾" F Flo-Equalizer™ |

UNITED
PETROLEUM EQUIPMENT INC.
300 Custer Dr.
Battle Creek, MI 49037
(800) 964-UPEI (8734)

2325 Husky Way • Pacific, MO 63069 • (800) 325-3558 • Fax (636) 825-7300 • www.husky.com • sales@husky.com